


| You are in: [Lozier Products](#) > [Products](#) > [S-Series Storage Crossbrace](#)

S-Series Storage Crossbrace


Part Number: **Part Number: SSX_**

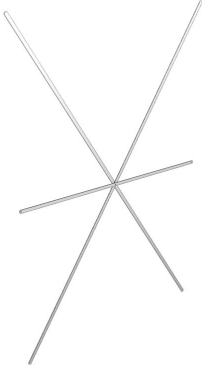

Product Details:

- S-Series Storage Sections must be stabilized with either Crossbraces or Back Panels
- Crossbraces (or Back Panels) are required on end sections of each run and every fourth section in between for stabilization
- See diagram below for minimum recommended placement of Crossbraces per run
- Back-to-back runs can share Crossbraces if Uprites are securely connected with S-Series Storage Screws (#SS2221)
- If the section height is over 96", two sets of Crossbraces are required for the section (one lower and one upper Crossbrace - see tables below)

MINIMUM BRACING REQUIREMENTS DIAGRAM

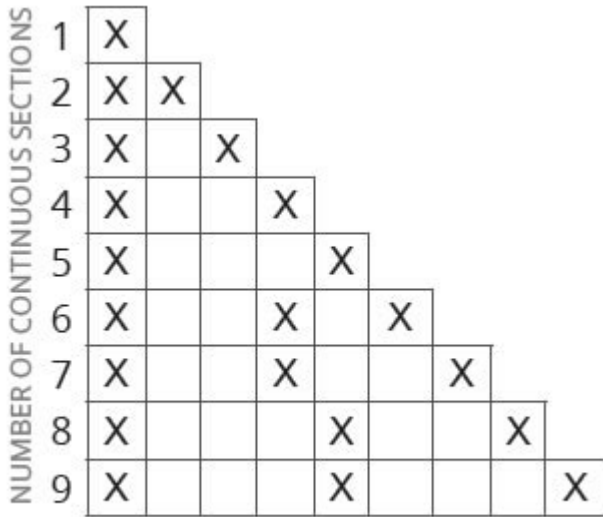

X = DENOTES BRACED SECTION

REGULAR DUTY APPLICATION		
SSU Height	Qty/Section	Crossbrace Part #
36H	1	SSX_36RD
48H	1	SSX_36RD
60H	1	SSX_36RD
72H	1	SSX_72RD
84H	1	SSX_72RD
96H	1	SSX_72RD

* need to specify 3ft or 4ft width

HEAVY DUTY APPLICATION		
SSU Height	Qty/Section	Crossbrace Part #
72H	1	SSX_72HD
84H	1	SSX_72HD
96H	1	SSX_72HD
108H	2	SSX_72RD
120H	2	SSX_72RD
144H	1	SSX_72HD
	1	SSX_72RD

* need to specify 3ft or 4ft width

Product Options and Numbers

Example Part #: **SSX 4 72 RD GLV**

S-Series Crossbrace: **SSX**

Section Width: **3', 4'**

Crossbrace Height: **36", 72"**

Crossbrace Type: **RD**, HD (72"H only)

Standard Finish: **GLV**

Suffix Key	
RD	- Regular Duty Crossbrace
HD	- Heavy Duty Crossbrace
GLV	- Galvanized