


| You are in: Lozier Products > Products > Widespan Gravity Flow Battery Rack

Widespan Gravity Flow Battery Rack

Part Number:

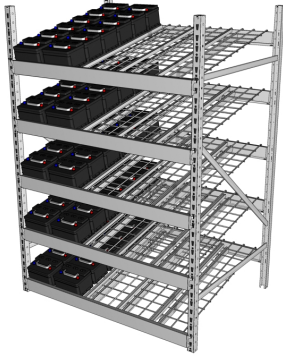

Product Details:

- Shelving configuration supported by Widespan Uprites 24", 30", 36", or 48" deep
- Utilizes Widespan Gravity Flow Inverted Beams installed offset. Rear beam is installed higher (See chart below with available offsets for respective depth and downslant angle)
- Widespan Gravity Flow Inverted Beams available 48"W
- Optional Gravity Flow Lane Guides install on grid wires to separate merchandise
- Gravity Flow Waterfall Wire Shelf includes welded steel support channels for merchandising heavy products like car batteries. Grid installs in the inverted step of the front and rear beam
- Wire shelf grid spacing is 3" x 3" on center


How to Order

- Order Widespan Uprites separately 24", 30", 36", or 48" deep in desired height (two required per individual section run and one additional for add-on sections)
- Order two 48"W inverted Widespan Beams per Gravity Flow level. A minimum of two beam levels is required per section. That could include a combination of Gravity Flow levels and flat levels. (see widespan shelf assemblies to order flat

levels) A beam must be installed within 6" of the floor and maximum spacing between beams is 48"

- Order one 48"W Gravity Flow Waterfall Wire Shelf for each Gravity Flow level (See chart offset and respective angle)

System Depth	Offset (Inches)	Downslant Angle (deg.)
24	2	6.84
30	4	9.17
36	6	10.71
48	8	10.41



COMPONENTS (ORDER SEPARATELY):

- A** - Widespan Upright Frame
- B** - Widespan Gravity Flow Inverted Beam (two per shelf level)
- C** - Widespan Gravity Flow Waterfall Wire Shelf
- D** - Widespan Gravity Flow Lane Guide

Widespan Upright Frame (One-Piece 48"H - 120"H)

- One-piece Upright Frames for units 48" - 120"
- Upright post slotted on face, allows shelf adjustment 2" on center
- Square holes punched on sides of Upright post for accessories
- Accessory holes punched 6" on center on face of Upright also aid beam placement
- Top Caps included on each Upright
- One Frame required for each section, plus one at end of each run
- To provide increased protection under harsh shipping conditions add "SPC" to part number for additional packaging
- Floor Anchors, Floor Protectors, or Back to Back Connectors may be ordered separately
- Evenly distributed load of 10,000 lbs per Upright Frame at 48" max. Beam spacing, vertically



REINFORCED UPRIGHT FRAME

- "RE" Frame available in 72" - 120"H and all depths (lower Frame only on 132" - 192")
- For use with hand loader/stacker
- Reduces chance of Frame damage
- Channel welded inside each post in lower 48"
- Welded foot plate for anchoring, 1/2" hole



Product Options and Numbers

Example Part #: **WSU 18 048 RE SPC PLT**

Widespan Upright : WSU

Depth: 18", 24", 30", 36", 42", 48"

Height: 048", 060", 072", 084", 096", 120"

Reinforced Upright for Hand Loader/ Stacker Applications: RE, Leave blank if not applicable

Additional Packaging: SPC, Leave blank if not applicable

Standard Finish: PLT, Optional Catalog Colors

Suffix Key	
PLT	-Platinum

Widespan Gravity Flow Inverted Beam

- Available 48" Wide
- 3 1/4" high with inverted step

Product Options and Numbers

Example Part #: WSB | 48 PK4 PLT


Widespan Beam: WSB

Inverted: I

Section Width: 48"

Unit of Measure: PK4


Standard Finish: PLT, Optional Catalog Colors

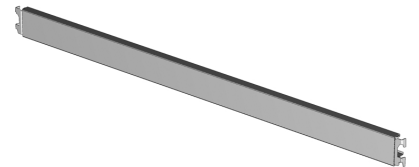

Suffix Key	
PK4	- 4 Pack
PLT	- Platinum

Widespan Gravity Flow Waterfall Wire Shelf

- Available 48W widespan section
- Fits widespan depth 24", 30", 36", or 48"
- Heavy gauge wire provides ability to merchandise heavy product like car batteries
- 3x3 grid spacing
- Fixed Offset for specific depth (see chart)

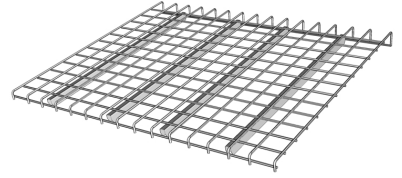

Product Options and Numbers

Example Part #: **WSGFWS 48 36 6 EA PLT**

Widespan Gravity Flow Wire Shelf: WSGFWS

System Width: 48"

System Depth: 24", 30", **36"**, 48"

Beam Offset: 2" (24" Deep), 4" (30" Deep), **6" (36" Deep)**, 8" (48" Deep)


Unit of Measure: **EA**

Standard Finish: **PLT**, Optional Catalog Colors

Suffix Key	
EA	- Each
PLT	- Platinum

Widespan Gravity Flow Lane Guides

- Available 18", 24", 30" and 42" long
- Order 6" less than nominal widespan gravity flow waterfall wire shelf depth
- Installs on 3x3 waterfall wire shelf wires
- Organizes shelf by creating product lanes

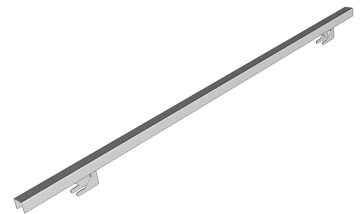

Product Options and Numbers

Part Number	Application

WSGFLG18PK25	18D for 24D Shelf
WSGFLG24PK26	24D for 30D Shelf
WSGFLG30PK20	30D for 36D Shelf
WSGFLG42PK30	42D for 48D Shelf